
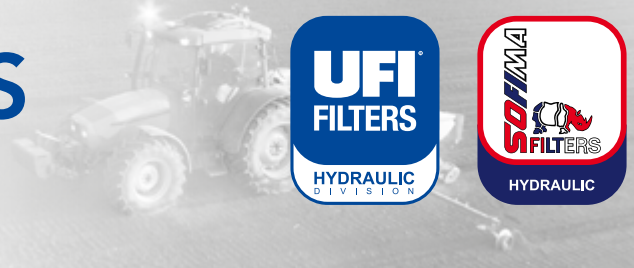







SUCTION FILTERS

CLOGGING INDICATORS



INDICATOR SERIE		DESCRIPTION	FOR SUCTION FILTERS SERIES
NBR	FKM		
10	-	Vacuum gauge	FSC - FSD - FSE FSB - MSE - AMF  
NBR	FKM		
11	-	Vacuum gauge	FSC - FSD FSB - MSE  
NBR	FKM	DIFFERENTIAL ELECTRICAL INDICATORS WITH LED (24V) FOR VISUAL INDICATION	
91	-	"Vacuum switch Setting 0,2 bar (20 kPa) SPDT"	FSC - FSD - FSE FSB - MSE - AMF   <p>ATEX 3 GD EEx e T6</p>
		SPDT, Max voltage 250V - 50 Hz - Max current 6 A resistive, 1 A inductive - Protection IP65 connector DIN 43650	