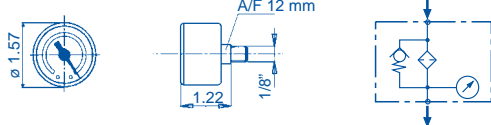
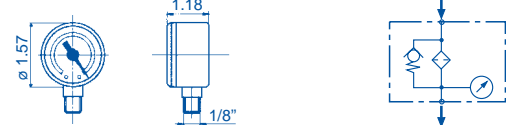


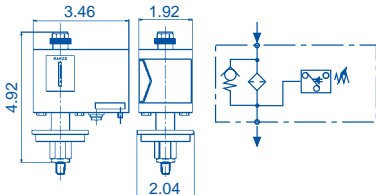
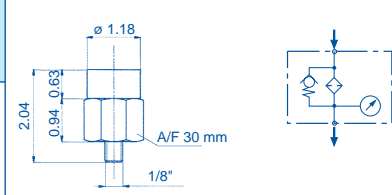
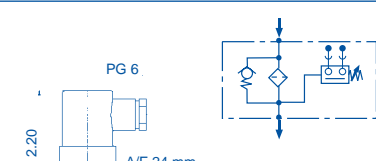
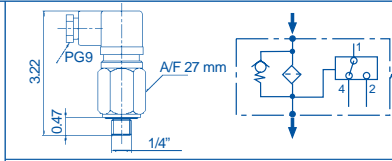
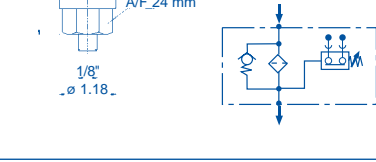
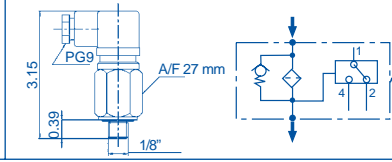
CLOGGING INDICATORS

Summing up

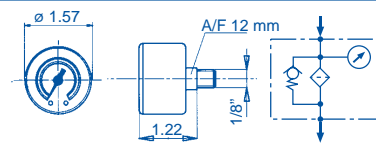
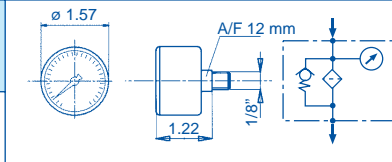
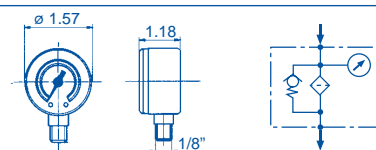
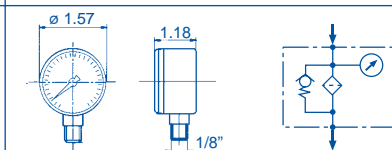
VACUUM GAUGE

Series		Series	
10		11	

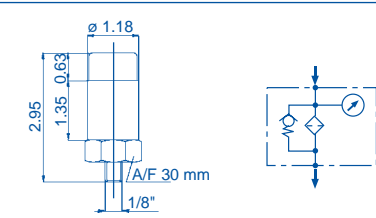
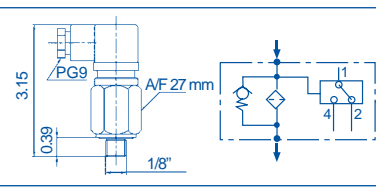
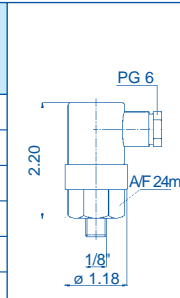
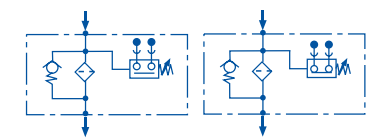
VACUUM SWITCH

Series	Description		Series	Description	
21	0+0,8 bar (0+11 psi) SPDT, adjustable		S8	0,25 bar (4 psi) Visual	
90	0,2 bar (29 psi) N.O.		L1	0,2 bar (3 psi) SPDT	
92	0,2 bar (29 psi) N.C.		91		
Max voltage 220 Vca 50-60 Hz, max current 0,5 A resistive, 0,25 A inductive, switching power 100 VA, protection IP65			Max voltage 250V – 50 Hz, max current 6 A resistive, 1 A inductive, protection IP65		

PRESSURE GAUGE

Series	Description		Series	Description	
30	0+6 bar (0+87 psi)		31	0+12 bar (0+174 psi)	
32	0+6 bar (0+87 psi)		33	0+12 bar (0+174 psi)	

PRESSURE SWITCH

Series	Description		Series	Description	
R8	1,5 bar (22 psi) Visual		80	1,5 bar (22 psi) N.O.	
P1	SPDT 1,5 bar (22 psi)	<p>Max voltage 220 Vca 50-60 Hz, max current 0,5 A resistive, 0,25 A inductive, switching power 100 VA, protection IP65</p> 	81	1,5 bar (22 psi) N.C.	
P6	2 bar (29 psi)		84	1,3 bar (19 psi) N.O.	
			85	1,3 bar (19 psi) N.C.	
			86	2 bar (29 psi) N.O.	
			87	2 bar (29 psi) N.C.	
Max voltage 250V – 50 Hz, max current 6 A resistive, 1 A inductive, protection IP65					

CLOGGING INDICATORS

Summing up

DIFFERENTIAL

VISUAL

Series	Description		Series	Description	
50	1,3 bar (20 psi)		U0	1,3 bar (20 psi)	
51	2 bar (30 psi)				
52	5 bar (75 psi)				
53	8 bar (120 psi)				
56	2,5 bar (36 psi)				
			K2	5 bar (75 psi)	
			K3	8 bar (120 psi)	

ELECTRICAL

Series	Description		Series	Description	
60	1,3 bar (20 psi)		N0	1,3 bar (20 psi)	
61	2 bar (30 psi)				
62	5 bar (75 psi)				
63	8 bar (120 psi)				
66	2,5 bar (36 psi)				
T0	1,3 bar (20 psi)				
T1	2 bar (30 psi)				
T2	5 bar (75 psi)				
T3	8 bar (120 psi)				
T6	2,5 bar (36 psi)				

VISUAL ELECTRICAL

Series	Description		Series	Description	
70	1,3 bar (20 psi)		Y2	5 bar (75 psi)	
71	2 bar (30 psi)				
72	5 bar (75 psi)				
73	8 bar (120 psi)				
76	2,5 bar (36 psi)				
			Y3	8 bar (120 psi)	

For indicators 6+ - 7+ - T+ - N0
 SPDT differential switch
 C.A. 125-250 V:
 > max resistive or inductive load 1 A

C.C. 30-50-75-125 V:
 > max resistive load
 2-0,5-0,25-0,2 A respectively
 > max inductive load
 2-0,5-0,25-0,03 A respectively

Protection IP65
 Connector DIN 43650

Technical data subject to variations without prior notice IN - US - 03/2005 - 1

UFI Universal Filter International - Hydraulic Division: 9337 Ravenna Road, Unit G - Twinsburg, OH 44087
 Phone (330) 4051800 - Fax (330) 4051801 - E-mail: ufilter@uhilt.com

UFI HYDRAULIC DIVISION - PLANET FILTERS S.p.A.
 via S.Chierico, 24 - 24060 Bolgare BG - Tel. 035 4493831 - Fax 035 843743
 e-mail: info@ufilter.it - http://www.ufilter.com

COMPANY WITH QUALITY SYSTEM
 CERTIFIED BY DNV
 = ISO 9001/2000 =
 COMPANY WITH ENVIRONMENTAL MANAGEMENT
 SYSTEM CERTIFIED BY DNV
 = ISO 14001 =